


STANDARD PHASE DESIGNATION DIAGRAM (NEMA)

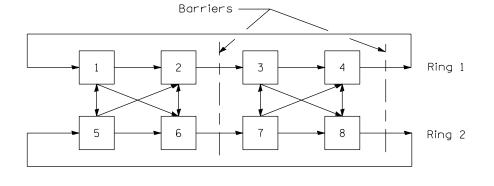

NEMA EIGHT PHASE DUAL RING ACTUATED CONFIGURATION

LEGEND

(X), X Vehicular phase no. x

(PX) Pedestrian phase no. x

 $\overline{\mathbb{A}}$, $\overline{\mathbb{B}}$, $\overline{\mathbb{C}}$, $\overline{\mathbb{D}}$ Right turn overlaps where:

B = 4 + 5

C = 6 + 7

D = 8 + 1 NEMA

National Electrical Manufacturers Association

All dimensions are in millimeters (inches) unless otherwise shown.

	Renum. Standard 2393-2. Totally revised.	DESIGNATION DIAGRAMS AND PHASE SEQUENCES (Sheet 1 of 2)
		STANDARD 857001

